


**LZZBW-15 OUTDOOR CURRENT TRANSFORMER**

This resin cast type current transformer is a support structure. It is suit to the polluting and humidity area. It is a kind of high accuracy, high dynamic stability, high thermal stability and large capacity product. Its metering iron core adopts the super crystallite magnetizer. This current transformer has the merits of small volume, light weight and can be installed at free direction.

Description of product's type:

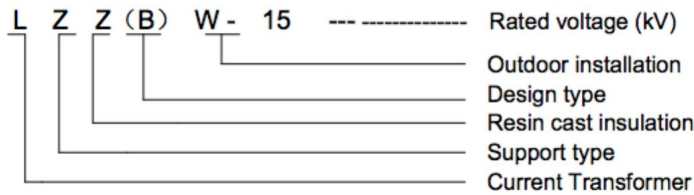

**Technical specification**

- (1) Rated insulation level: 15/38/95kV;
- (2) Standard: IEC60044.1-2003 Current transformer;
- (3) Load power factor:  $\cos\Phi=0.8$  (delay);
- (4) Rated secondary current: 5A or 1A;
- (5) Meter protection factor:  $FS \leq 10$ ;
- (6) Surface creepage distance: confirm to the requirement of pollution class II ;
- (7) Partial discharge level: confirm to the requirement of GB7354-97, visual discharge electricity less than 20PC;
- (8) Main technical specification as below:

Ratio (A)	Class	Capacity	Tender No.
200-400	0.5S (IEC)	12.5VA	TMIMT-3C

Outline dimension drawing:

